ABS | Upright Cabinets

REFRIGERATED UPRIGHT ▶ GLASS DOOR ▶ WHITE PAINTED

CRXG 6

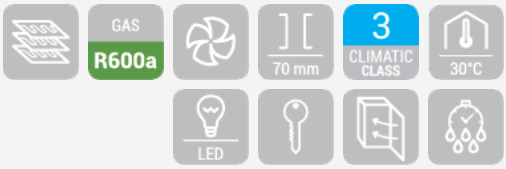

DETAILS

Cabinet suitable for GN2/1 pans

Cabinet suitable for N.2 GN1/1 pans

Inner assistance fan

Air circulating fan assistance

Blue backlit main switch

Shelf with small distance between the line and bottom shelf fittes as standard



External cylindric handle in stainless steel (Steel color for X Version)

GENERAL FEATURES

GN2/1 Refrigerated upright (GLASS DOOR)	•
S/S external cabinet, thermoformed internally	•
Roll-bond evaporator system with fan assisted cooling	•
Automatic compressor cycle defrost	•
Foaming Agent Cyclopentane (70mm per side)	•
Digital Thermostat and internal LED light	•
High temperature alarm	•
Removable Gasket	•
Door: Self closing and reversible door fitted as standard	•
Lock and main switch fitted as standard	•
Adjustable shelves GN2/1: 4 Pcs + 1 Pcs Bottom	•
N.2 Adjustable feet + N.2 Rollers at the back	•
Stainless steel external handle	•
Energy efficiency class: D	•

PRODUCT DIMENSIONS

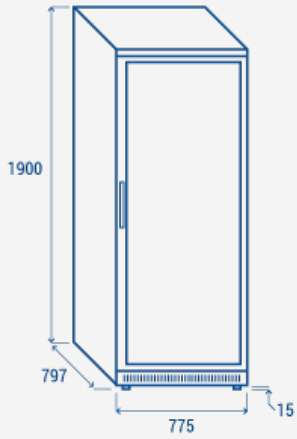

TECHNICAL SPECIFICATIONS

Capacity	**600 L**
Temperature	**+2°C ~ +8°C**
Consumption	**2.493 kWh/24h**
Rated Power	**150 W**
Noise level	**68 dB(A)**
Net Weight	**118 Kg**
Gross Weight	**132 Kg**
External Dimensions (WxDxH mm)	**775x797x1900**
Internal Dimensions (WxDxH mm)	**596x572x1628**
Packaging dimensions (WxDxH mm)	**835x792x2070**
Loading quantities 20'/40'/40'HQ	**20/42/42**

CERTIFICATION

CE RoHS

RIGHTWAY ASIA
We make the world a cooler place